

# METALTECH

40 YEARS



**CATALOGUE 2026**

# MOBILE SCAFFOLDING JOBSITE SERIES™

A black mobile scaffolding work platform is shown in a close-up, angled view. On the platform, there is a large white paint can with a blue handle, a screwdriver with a blue and black handle, and a roll of green tape. The background is a plain, light-colored surface.

Discover Metaltech's fresh, new product and packaging design with our innovative mobile scaffold work platform offering. Innovative safety rail, foldaway tool shelf, locking mechanisms are only a few of the features included in this category. These quick and easy to assemble work platforms offer consumers and contractors affordability, safety and ease of use, all in easy to merchandise packages.

- **SAFETY RAILS**
- **FOLDAWAY TOOL SHELF**
- **GREAT PACKAGING**



**JOBSITE SERIES**

**BUILT TOUGH FOR  
SAFETY**

**METALTECH**<sup>®</sup>

# JOBSITE SERIES

## 6' BAKER

/I-CISCM2/



Video manual  
Jobsite 6  
Baker

INFO



### MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways.

**454** kg  
LOAD CAPACITY

**3,7** m  
REACH



### QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 5cm od 69cm to 185cm. Double prong spring-loaded locking mechanism.



### COMPACT

A minimum number of scaffolding pieces makes it quick to assemble and easy to store.

<b>ASSEMBLED DIMENSIONS (W x D x H)</b>	<b>189,9 x 75,6 x 190,5 cm</b>
<b>PACKAGE DIMENSIONS (W x D x H)</b>	190,5 x 77,5 x 13,3 cm
<b>WEIGHT</b>	51,6 kg
<b>LOAD CAPACITY</b>	454 kg / combined weight of user + materials
<b>WORKING HEIGHTS</b>	from 68,6 cm to 185 cm - 5 cm increment adjustable heights
<b>REACH</b>	3,7 m
<b>FINISH</b>	powder coated
<b>PLATFORM</b>	plywood deck wirth protective steel edge banding
<b>STRUCTURE</b>	3,8 cm square tube, 16 grade steel
<b>CASTERS</b>	13 cm - double locking heavy duty
<b>MODEL</b>	<b>I-CISCM2</b>

\* All trademarks and registered trademarks listed above are the property of their respective owners.

MAXIMUM REACH HEIGHT | **3,7 m**

MAXIMUM PLATFORM HEIGHT | **1,85 m**

MINIMUM PLATFORM HEIGHT | **69 cm**



1 UNIT AND GUARDRAILS

# OPTIONS

	DESCRIPTION	ASSEMBLED DIMENSIONS (W x D x H)	PACKAGE DIMENSIONS (W x D x H)	WEIGHT	MODEL
	<b>GUARDRAILS SYSTEM</b>	177,2 x 74,3 x 113 cm	116,8 x 79,4 x 11,4 cm	25,2 kg	<b>I-CISGRJPM2</b>
	<b>ACCESS SAFETY GUARDRAILS</b>	187,3 x 50,17 x 3,81 cm	109,22 x 55,88 x 8,89 cm	14,88 kg	<b>I-CISCPVGREUM2</b>
	<b>SET OF 4 BASE PLATES</b>	12 x 12 x 12 cm	27,8 x 13,3 x 13,8 cm	4,6 kg	<b>I-TBBF4M2</b>
	<b>SET OF 4 LEVELING JACKS</b>	23,6 x 13,5 x 31 cm	33,6 x 33,2 x 20,4 cm	11 kg	<b>I-TBSJP12H4M2</b>
	<b>SET OF 14" OUTRIGGERS</b>	40,6 x 9,5 x 59,25 cm	57,8 x 40,6 x 12,7 cm	14,3 kg	<b>I-CIS04M2</b>
	<b>ADD-ON STORAGE SHELF</b>	188,6 x 64,8 x 5 cm	188,6 x 64,8 x 5 cm	12,5 kg	<b>I-CISSUM2</b>

# JOBSITE SERIES™

## 6' BAKER /I-CISCEUM2/

### SAFECLIMB™


**SAFECLIMB™**  
PLATFORM



INFO

#### ANTI-SLIP RUNGS

Nonslip rungs help with moisture issues on footwear.



#### CLIMB THROUGH PLATFORM

Keeps your weight in the center of the unit for safer climbing.



#### ANTI-SLIP DECK

Made of 1,3 cm anti-slip film coated plywood


**567 kg**  
LOAD CAPACITY

**3,7 m**  
REACH







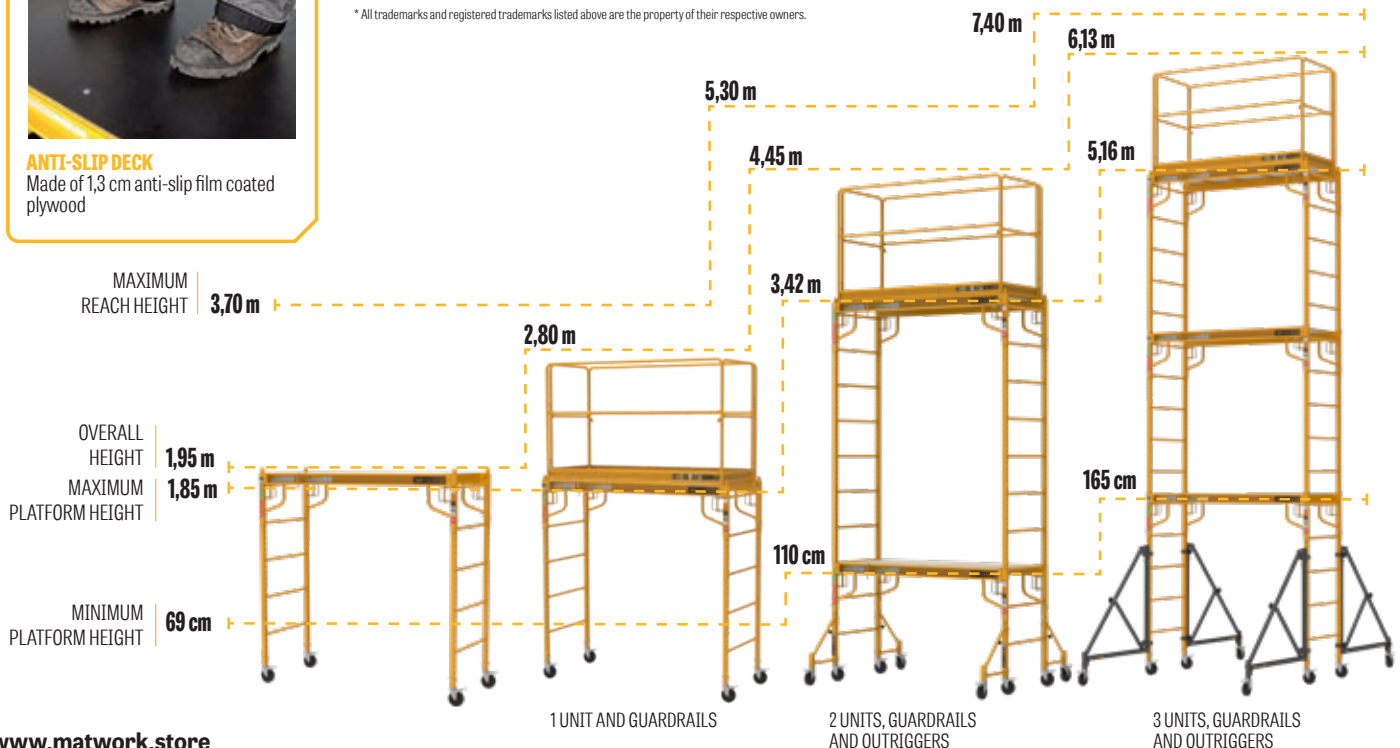




<b>ASSEMBLED DIMENSIONS (W X D X H)</b>	<b>189,9 x 75,6 x 190,5 cm</b>
<b>PACKAGE DIMENSIONS (W X D X H)</b>	190,5 x 76,2 x 13,3 cm
<b>WEIGHT</b>	54,4 kg
<b>LOAD CAPACITY</b>	567 kg, combined weight of user + materials
<b>WORKING HEIGHTS</b>	from 68,6 to 185 cm, 5 cm increment adjustable heights
<b>REACH</b>	3,7 m, stackable up to 3 units high for 7,4 m reach
<b>FINISH</b>	powder coated
<b>PLATFORM</b>	slip-resistant plywood deck with trapdoor
<b>STRUCTURE</b>	3,8 cm square tube, 16 gauge steel
<b>CASTERS</b>	13 cm double locking heavy duty
<b>STANDARD</b>	EN 1004-1
<b>MODEL</b>	<b>I-CISCEUM2</b>

\* All trademarks and registered trademarks listed above are the property of their respective owners.



# OPTIONS

	DESCRIPTION	ASSEMBLED DIMENSIONS (W x D x H)	PACKAGE DIMENSIONS (W x D x H)	WEIGHT	MODEL
	<b>GUARDRAILS SYSTEM</b>	177,2 x 74,3 x 113 cm	116,8 x 79,4 x 11,4 cm	25,2 kg	<b>I-CISGRJPM2</b>
	<b>ACCESS SAFETY GUARDRAILS</b>	187,3 x 50,17 x 3,81 cm	109,22 x 55,88 x 8,89 cm	14,88 kg	<b>I-CISCPVGREUM2</b>
	<b>39" HIGH EXTENSION</b>	187,3 x 73,7 x 108 cm	212,1 x 78,1 x 9,5 cm	27,3 kg	<b>I-ISEX4PPNCASM2</b>
	<b>SET OF 4 BASE PLATES</b>	12 x 12 x 12 cm	27,8 x 13,3 x 13,8 cm	4,6 kg	<b>I-TBBF4M2</b>
	<b>SET OF 4 LEVELING JACKS</b>	23,6 x 13,5 x 31 cm	33,6 x 33,2 x 20,4 cm	11 kg	<b>I-IBSJP12H4M2</b>
	<b>SET OF 14" OUTRIGGERS</b>	40,6 x 9,5 x 59,25 cm	57,8 x 40,6 x 12,7 cm	14,3 kg	<b>I-CIS04M2</b>
	<b>SET OF 14" FOLDING OUTRIGGERS</b>	39,4 x 8,9 x 60,3 cm	68,9 x 17,1 x 83,2 cm	11,2 kg	<b>I-CIS04FDM2</b>
	<b>SET OF 46" UNIVERSAL OUTRIGGERS</b>	130,8 x 101,6 x 132,7 cm	162,6 x 39,4 x 15,2 cm	47,3 kg	<b>I-BMS04TTM2</b>
	<b>ADD-ON STORAGE SHELF</b>	188,6 x 64,8 x 5 cm	188,6 x 64,8 x 5 cm	12,5 kg	<b>I-CISSUM2</b>

**JOBSITE SERIES**

# JOBSITE SERIES 6'

/I-IRCM2/



**385 kg**  
LOAD CAPACITY

**3,0 m**  
REACH

<b>ASSEMBLED DIMENSIONS (W x D x H)</b>	<b>190,5 x 77,5 x 198,8 cm</b>
<b>PACKAGE DIMENSIONS (W x D x H)</b>	195 x 78,7 x 17,2 cm
<b>WEIGHT</b>	61,5 kg
<b>LOAD CAPACITY</b>	385 kg / combination of worker + material weight, 136 kg per platform
<b>WORKING HEIGHTS</b>	33 - 63,5 - 94 cm
<b>REACH</b>	3 m
<b>FINISH</b>	powder coating
<b>PLATFORM</b>	3 anti-slip platforms, grade 14 steel
<b>STRUCTURE</b>	3,8 cm round profile, grade 16 steel
<b>CASTERS</b>	13 cm, solid with double locking
<b>MODEL</b>	<b>I-IRCM2</b>

JOBSITE SERIES

## INFO



**3 INDEPENDENT PLATFORMS**  
Allows the worker to quickly get on and off the scaffolding.



**EASY STORAGE**  
Folds flat for compact storage and transport



**TWO-MINUTE ASSEMBLY**  
No tools required.

# JOBSITE SERIES 5' /I-IMISM2/



**408 kg**  
LOAD CAPACITY

**3,0 m**  
REACH

<b>ASSEMBLED DIMENSIONS (W x D x H) WITH OPEN TOOL SHELF</b>	<b>128,3 X 78,7 X 194,3 cm</b>
<b>PACKAGE DIMENSIONS (W x D x H)</b>	111,8 x 58,4 x 19,1 cm
<b>WEIGHT</b>	35 kg
<b>LOAD CAPACITY</b>	408 kg / combination of worker's weight + material, 204 kg per platform
<b>WORKING HEIGHTS</b>	29 - 64 - 95 cm
<b>REACH</b>	3 m
<b>FINISH</b>	powder coating
<b>PLATFORM</b>	2 anti-slip platforms and 1 step, grade 14 steel
<b>STRUCTURE</b>	3,2 cm round profile, grade 16 steel
<b>CASTERS</b>	13 cm, heavy-duty with double locking
<b>MODEL</b>	<b>I-IMISM2</b>

JOBSITE SERIES



### TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites.



### TOOL SHELF & SAFETY RAIL

Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



### WORKBENCH

Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

INFO

# JOBSITE SERIES 4' /I-IMCNTM2/



FOLD AWAY TOOL SHELF



**227 kg**  
LOAD CAPACITY

**2,7 m**  
REACH



<b>ASSEMBLED DIMENSIONS (W x D x H) WITH OPEN TOOL SHELF</b>	<b>125,7 x 57,2 x 146,7 cm</b>
<b>PACKAGE DIMENSIONS (W x D x H)</b>	109,9 x 61 x 114 cm
<b>WEIGHT</b>	26,8 kg
<b>LOAD CAPACITY</b>	227 kg / combination weight of user + material, 113 kg per platform
<b>WORKING HEIGHTS</b>	25 - 55 - 84 cm
<b>REACH</b>	2,75 m
<b>FINISH</b>	powder coating
<b>PLATFORM</b>	2 anti-slip platforms, grade 14 steel
<b>STRUCTURE</b>	2,5 cm round profile, grade 16 steel
<b>CASTERS</b>	10 cm, heavy-duty with double locking
<b>MODEL</b>	<b>I-IMCNTM2</b>

INFO



**TOOL SHELF & SAFETY RAIL**  
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



**TRANSPORT**  
Use it as a cart to haul your equipment and heavy loads to and from job sites. Capacity 227kg.



**WORKBENCH**  
Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

# ALU SERIES 6' /I-CAIRCM2/



**318 kg**  
LOAD CAPACITY

**3,0 m**  
REACH

ALU SERIES

<b>ASSEMBLED DIMENSIONS (W x D x H)</b>	<b>143,5 x 73,7 x 182,9 cm</b>
<b>PACKAGE DIMENSIONS (W x D x H)</b>	<b>171,5 x 77,5 x 16,5 cm</b>
<b>WEIGHT</b>	<b>27 kg</b>
<b>LOAD CAPACITY</b>	<b>318 kg / combination of worker's weight and material</b>
<b>WORKING HEIGHTS</b>	<b>30 - 60 - 90 cm</b>
<b>REACH</b>	<b>3 m</b>
<b>FINISH</b>	<b>anodized aluminum</b>
<b>PLATFORM</b>	<b>3 anti-slip platforms, aluminum alloy 6063</b>
<b>STRUCTURE</b>	<b>3,8 cm round profile, aluminum alloy 6063</b>
<b>CASTERS</b>	<b>13 cm, heavy-duty with double locking</b>
<b>MODEL</b>	<b>I-CAIRCM2</b>



**LIGHTWEIGHT**  
This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



**TRANSPORT**  
Use it as a cart to haul your equipment and heavy loads to and from job sites. Capacity 318kg.




**EASY STORAGE**  
Folds flat for compact storage and transport.

INFO

# MULTI-FUNCTION WORKBENCH 5-IN-1

JOBSITE SERIES

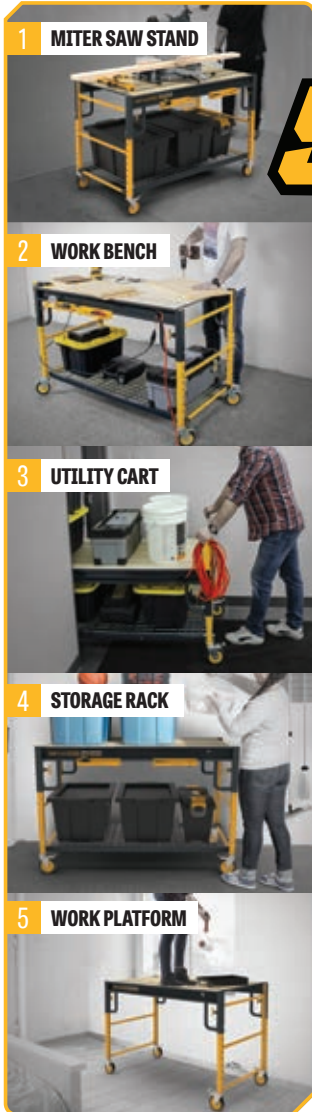

**5 IN 1**



**227 kg**  
LOAD CAPACITY

**3,0 m**  
REACH

<b>ASSEMBLED DIMENSIONS (W X D X H)</b>	<b>143,5 x 74,30 x 95,3 cm</b>
<b>PACKAGE DIMENSIONS (W X D X H)</b>	152,4 x 10,2 x 77,5 cm
<b>WEIGHT</b>	44,8 kg
<b>LOAD CAPACITY</b>	SCAFFOLDING: 227 kg. Combined weight of user + materials. STORAGE SHELF: 90,7 kg distributed weight.
<b>WORKING HEIGHTS</b>	49,5 to 94,5 cm, 5 cm increment adjustable heights
<b>REACH</b>	3,0 m
<b>FINISH</b>	powder coated
<b>STRUCTURE</b>	3,8 cm square tube, 16 gauge steel
<b>CASTERS</b>	13 cm, double locking heavy duty
<b>MODEL</b>	<b>I-SB3MM2</b>

INFO



TOOL BIN ORGANIZERS



MATERIAL SUPPORT



POWER CORD HOLDER

# BUILDMAN® DRYWALL STILTS



**102 kg**  
LOAD CAPACITY

	18-30 IN. DRYWALL STILTS	24-40 IN. DRYWALL STILTS
ASSEMBLED DIMENSIONS (1 STILT) (W X D X H)	31,8 x 15,2 x 96,5 cm	31,8 x 15,2 x 111,8 cm
PACKAGE DIMENSIONS (2 STILTS) (W X D X H)	33,7 x 20,3 x 63,5 cm	33,7 x 20,3 x 63,5 cm
ADJUSTABLE HEIGHTS	46 up to 76 cm 5 cm increment adjustable heights.	61 cm up to 1 m 5 cm increment adjustable heights.
MAXIMUM REACH*	2,82 m	3,5 m
MATERIAL	ANODIZED aluminum	ANODIZED aluminum
WEIGHT (1 STILT)	3,2 kg	3,7 kg
LOAD CAPACITY	102 kg	102 kg
MODEL	<b>I-BMDS1830</b>	<b>I-BMDS2440</b>

\*Calculated with 1.75 m person with a vertical 30 cm reach

**BUILDMAN™ GRADE**



**ADJUSTABLE**  
Adjustable heights.



**DUAL SPRING ACTION**  
For more flexibility and natural walking feel



**CONTACT GRIP**  
One piece rubber outsole

**INFO**

# JAWCLAW™ PANEL GRIPPER



**90,7 kg**  
LOAD CAPACITY


**BUILDMAN™ GRADE**

DESCRIPTION	JAWCLAW™ PANEL GRIPPER
GRIPPER CLAMP	adjusts to panel up to 28,6 mm
MATERIAL	aircraft grade Aluminum and ABS polymer
WEIGHT	0,88 kg
LOAD CAPACITY	90,7 kg
MODEL	I-IJCM2


## INFO



**ONE HAND; 2 SHEETS**

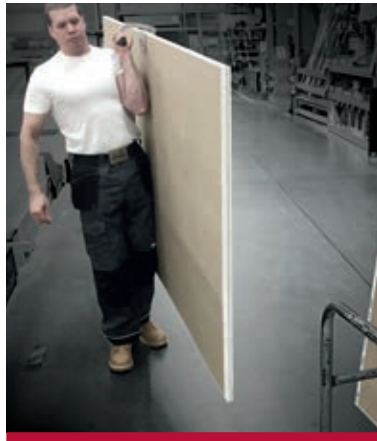

**EASY ON YOUR BACK**

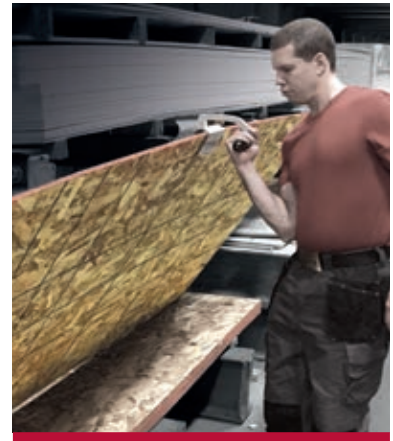

**PERFECT TO LIFT AND CARRY ALL KINDS OF PANELS**

# BUILDMAN® H-CART

BUILDMAN™ GRADE



INFO

KINGPINLESS



POLYURETHANE CASTER



**1361** kg  
LOAD CAPACITY

<b>ASSEMBLED DIMENSIONS (W X D X H)</b>	<b>127 x 70.5 x 122.6 cm</b>
<b>PACKAGE DIMENSIONS (W X D X H)</b>	128,9 x 69,2 x 17,1 cm
<b>PLATFORM DIMENSIONS</b>	127 x 42 cm, can carry up to 20 gypsum boards of 16 mm. 127 x 70,5 cm Flat bed configuration
<b>WEIGHT</b>	45,8 kg
<b>LOAD CAPACITY</b>	1,361 kg
<b>FINISH</b>	powder coated
<b>CASTERS</b>	20 cm, 4 SWIVEL Casters, 1 Directional lock and 1 Caster brake
<b>HANDLE BAR</b>	5 cm outside diameter, 9 gauge steel
<b>MODEL</b>	<b>I-BMDHER31YGRM2</b>



IN WIDTH



IN LENGTH

INFO

The H-Cart connector allows you to combine H-Carts together. Two configurations are possible: in length and in width.

<b>DESCRIPTION</b>	<b>H-CART CONNECTOR</b>
<b>QUANTITY PER BOX</b>	2
<b>WEIGHT</b>	3,62 kg
<b>MODEL</b>	<b>I-BMDHBRM2</b>

INFO

**1** DRYWALL CART

**2** MATERIAL PUSH CART

**3** RESTRAINED TRANSPORT

**4** FLAT BED

**JOBSITE  
SERIES™**

**BuildMan  
Grade**

**Fiberglass  
Series™**

**SAFERSTACK  
A METALTECH INNOVATION**

**ALU  
SERIES™**



**BUILT TOUGH FOR  
SAFETY**

**MW**  
MATWORK

official European  
importer of

**METALTECH**®

**Matwork s.r.o.**

contact@matwork.store  
www.matwork.store

**WWW.METALTECH.CO**

