

METALTECH

40 YEARS



MOBILE SCAFFOLDING

OVERVIEW OF METALTECH® SCAFFOLDING

JOBSITE SERIES



JOBSITE SERIES

6' BAKER

/I-CISC/

454 kg
LOAD CAPACITY

3,7 m
REACH



6' BAKER TOWER

JOBSITE SERIES

6'

/I-IRC/

385 kg
LOAD CAPACITY

3,7 m
REACH





JOBSITE SERIES

5'

/I-IMIS/

408 kg
LOAD CAPACITY

3,0 m
REACH



JOBSITE SERIES

4'

/I-IMCNT/

227 kg
LOAD CAPACITY

2,7 m
REACH



JOBSITE SERIES



ALU SERIES

6'

/I-CAIRC/

318 kg
LOAD CAPACITY

3,6 m
REACH



ALU SERIES

MOBILE SCAFFOLDING JOBSITE SERIES™

A black mobile scaffolding work platform is shown in a close-up, angled view. On the platform, there is a large white paint can with a blue handle, a screwdriver with a blue and black handle, and a roll of green tape. The platform has a safety rail and a foldaway tool shelf. The background is a plain, light-colored wall.

Discover Metaltech's fresh, new product and packaging design with our innovative mobile scaffold work platform offering. Innovative safety rail, foldaway tool shelf, locking mechanisms are only a few of the features included in this category. These quick and easy to assemble work platforms offer consumers and contractors affordability, safety and ease of use, all in easy to merchandise packages.

- **SAFETY RAILS**
- **FOLDAWAY TOOL SHELF**
- **GREAT PACKAGING**



JOBSITE SERIES

**BUILT TOUGH FOR
SAFETY**

METALTECH®

JOBSITE SERIES 6' BAKER

/I-CISC/

JOBSITE SERIES



INFO

MULTI PURPOSE

Suitable and safe for all types of interior work. Each end can adjust separately to be used on both level surfaces and stairways.



QUICK AND EASY HEIGHT ADJUSTMENT

Platform height adjusts at 5cm od 69cm to 185cm. Double prong spring-loaded locking mechanism.



STACKABLE UP TO 5,5M

Easily stackable up to three units high in order to reach a range of 7,4 m.



Video manual
Jobsite 6
Baker


454 kg
LOAD CAPACITY

3,7 m
REACH



ASSEMBLED DIMENSIONS (W x D x H)	189,9 x 75,6 x 190,5 cm
PACKAGE DIMENSIONS (W x D x H)	190,5 x 77,5 x 13,3 cm
WEIGHT	51,6 kg
LOAD CAPACITY	454 kg / combined weight of user + materials
WORKING HEIGHTS	from 68,6 cm to 185 cm - 5 cm increment adjustable heights
REACH	3,7 m - stackable up to 3 units high for 7,4 m reach
FINISH	powder coated
PLATFORM	plywood deck wirth protective steel edge banding
STRUCTURE	3,8 cm square tube, 16 grade steel
CASTERS	13 cm - double locking heavy duty
MODEL	I-CISC

* All trademarks and registered trademarks listed above are the property of their respective owners.

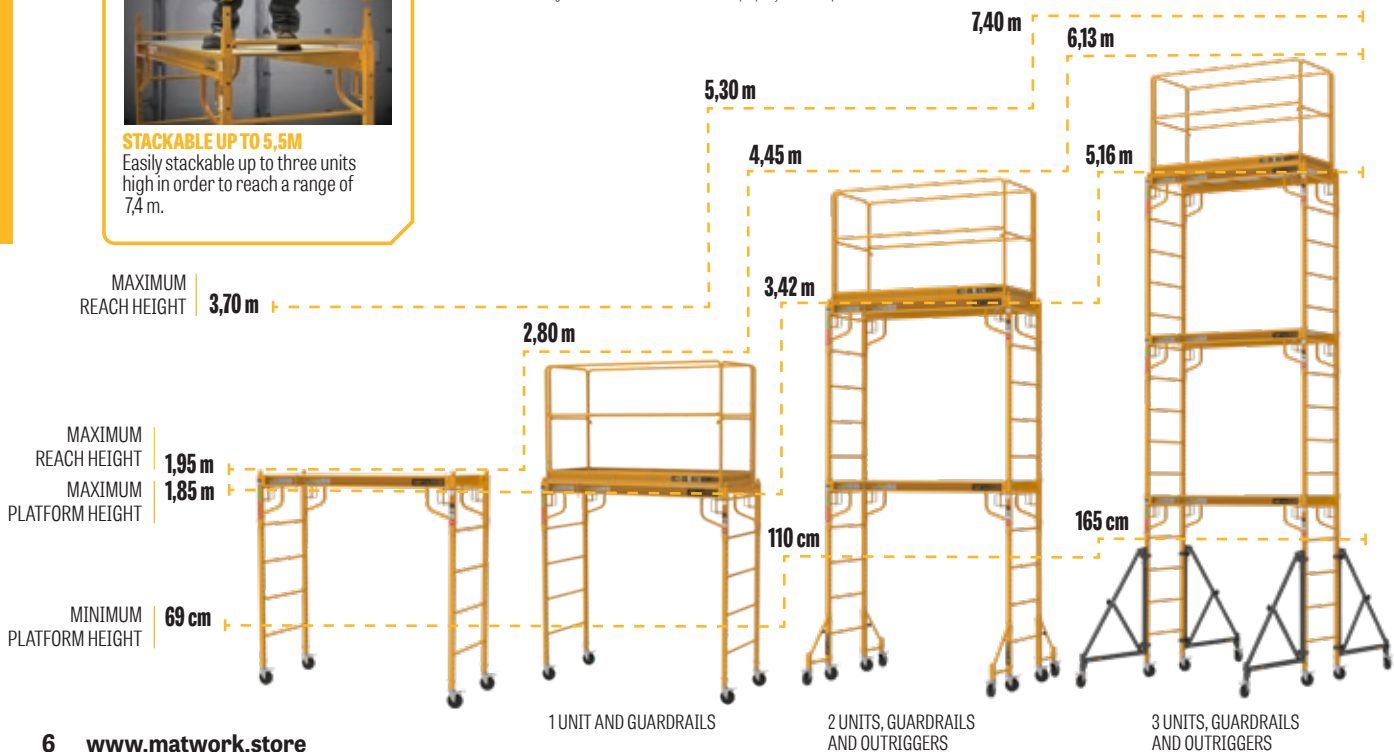

OPTIONS




DESCRIPTION	BAKER SAFETY GUARDRAIL	BAKER 1m HIGH EXTENSION
ASSEMBLED DIMENSIONS (W x D x H)	177,2 x 74,3 x 113 CM	187,3 x 73,7 x 108 cm
PACKAGE DIMENSIONS (W x D x H)	116,8 x 79,4 x 11,4 cm	212,1 x 78,1 x 9,5 cm
WEIGHT	25,2 kg	27,3 kg
INCLUDED IN THE BOX	2 guardrails with gates, 4 toggle pins	2 side frames, 2 braces, 8 locking pins
COMPATIBLE WITH	I-CISC, I-CAISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT a I-BMSS	I-CISC, I-CISCTP I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT AND I-BMSS
MODEL	I-CISGRJP	I-ISEX4PPNCAS



FOR 2 UNITS HIGH

DESCRIPTION	BAKER SET OF 35 cm OUTRIGGERS
ASSEMBLED DIMENSIONS (W x D x H)	40,6 x 9,5 x 59,25 cm
PACKAGE DIMENSIONS (W x D x H)	56 x 41 x 12 cm
ADJUSTABLE	N/A
WEIGHT	14,25 kg
INCLUDED IN THE BOX	4 supports, 4 wheels **, 12 locking pins
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCH1, I-CISCAS, I-CISCMT AND I-CAISC
MODEL	I-CISO4

**13 cm DOUBLE LOCKING HEAVY DUTY



ADJUSTABLE



FOR 3 UNITS HIGH

DESCRIPTION	BAKER SET OF 117 cm OUTRIGGERS
ASSEMBLED DIMENSIONS (W x D x H)	130,81 X 101,6 X 132,72 cm
PACKAGE DIMENSIONS (W x D x H)	162,56 x 39,4 x 15,2 cm
ADJUSTABLE	angle 90°, 45°
WEIGHT	47,3 kg
INCLUDED IN THE BOX	4 supports, 4 wheels **, 8 locking pins
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CAISC, I-CISCH1, I-CISCAS, I-CISCDW, I-CISCMT, I-CISCPYA, I-BMSS
MODEL	I-BMSO4TT

**13 cm DOUBLE LOCKING HEAVY DUTY



DESCRIPTION	BAKER PLATFORM WITH TRAP DOOR
ASSEMBLED DIMENSIONS (W x D x H)	170,2 x 73,7 x 3,8 cm
PACKAGE DIMENSIONS (W x D x H)	174 x 77,5 x 5,1 cm
ADJUSTABLE	N/A
WEIGHT	17,3 kg
INCLUDED IN THE BOX	platform 1 pc
COMPATIBLE WITH	I-CISC, I-CISCTP, I-CISCAS, I-CISCMT AND I-CISCDW
MODEL	I-CISPT

JOBSITE SERIES 6'

/I-IRC/



385 kg
LOAD CAPACITY

3,7 m
REACH

ASSEMBLED DIMENSIONS (W x D x H)	190,5 x 77,5 x 198,8 cm
PACKAGE DIMENSIONS (W x D x H)	195 x 78,7 x 17,2 cm
WEIGHT	61,5 kg
LOAD CAPACITY	385 kg / combination of worker + material weight, 136 kg per platform
WORKING HEIGHTS	33 - 63,5 - 94 - 124,5 - 155 cm
REACH	3,7 m
FINISH	powder coating
PLATFORM	3 anti-slip platforms, grade 14 steel
STRUCTURE	3,8 cm round profile, grade 16 steel
CASTERS	13 cm, solid with double locking
MODEL	I-IRC

JOBSITE SERIES

INFO



3 INDEPENDENT PLATFORMS
Allows the worker to quickly get on and off the scaffolding.



EASY STORAGE
Folds flat for compact storage and transport



TWO-MINUTE ASSEMBLY
No tools required.

JOBSITE SERIES 5'

/I-IMIS/



408 kg
LOAD CAPACITY

3,0 m
REACH

ASSEMBLED DIMENSIONS (W x D x H) WITH OPEN TOOL SHELF	128,3 X 78,7 X 194,3 cm
PACKAGE DIMENSIONS (W x D x H)	111,8 x 58,4 x 19,1 cm
WEIGHT	35 kg
LOAD CAPACITY	408 kg / combination of worker's weight + material, 204 kg per platform
WORKING HEIGHTS	29 - 64 - 93 - 122 cm
REACH	3 m
FINISH	powder coating
PLATFORM	2 anti-slip platforms and 1 step, grade 14 steel
STRUCTURE	3,2 cm round profile, grade 16 steel
CASTERS	13 cm, heavy-duty with double locking
MODEL	I-IMIS

JOBSITE SERIES



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites.



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



WORKBENCH
Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

INFO

JOBSITE SERIES 4' /I-IMCNT/

JOBSITE SERIES

FOLD AWAY TOOL SHELF



227 kg
LOAD CAPACITY

2,7 m
REACH



ASSEMBLED DIMENSIONS (W x D x H) WITH OPEN TOOL SHELF	125,7 x 57,2 x 146,7 cm
PACKAGE DIMENSIONS (W x D x H)	109,9 x 61 x 114 cm
WEIGHT	26,8 kg
LOAD CAPACITY	227 kg / combination weight of user + material, 113 kg per platform
WORKING HEIGHTS	25 - 55 - 84 cm
REACH	2,75 m
FINISH	powder coating
PLATFORM	2 anti-slip platforms, grade 14 steel
STRUCTURE	2,5 cm round profile, grade 16 steel
CASTERS	10 cm, heavy-duty with double locking
MODEL	I-IMCNT

INFO



TOOL SHELF & SAFETY RAIL
Safety rail to hold on to, for stability. Convenient fold away tool shelf for paint can, bucket, screws, nails and tools.



TRANSPORT
Use it as a cart to haul your equipment and heavy loads to and from job sites. Capacity 227kg.



WORKBENCH
Multi-level working area. Adjust platforms up to the desired level for a comfortable workplace.

ALU SERIES 6' /I-CAIRC/



318 kg
LOAD CAPACITY

3,6 m
REACH

ASSEMBLED DIMENSIONS (W x D x H)	143,5 x 73,7 x 182,9 cm
PACKAGE DIMENSIONS (W x D x H)	171,5 x 77,5 x 16,5 cm
WEIGHT	27 kg
LOAD CAPACITY	318 kg / combination of worker's weight and material
WORKING HEIGHTS	30 - 60 - 90 - 119 - 150 cm
REACH	3,6 m
FINISH	anodized aluminum
PLATFORM	3 anti-slip platforms, aluminum alloy 6063
STRUCTURE	3,8 cm round profile, aluminum alloy 6063
CASTERS	13 cm, heavy-duty with double locking
MODEL	I-CAIRC

ALU SERIES



LIGHTWEIGHT

This aluminum scaffolding offers all the benefits of our steel models, but is lighter and corrosion resistant.



TRANSPORT

Use it as a cart to haul your equipment and heavy loads to and from job sites. Capacity 318kg.



EASY STORAGE

Folds flat for compact storage and transport.

INFO

**JOBSITE
SERIES™**

**BuildMan
Grade**

**Fiberglass
Series™**

SAFERSTACK
A METALTECH INNOVATION

**ALU
SERIES™**



**BUILT TOUGH FOR
SAFETY**

MW
MATWORK

official European
importer of

METALTECH®

Matwork s.r.o.

contact@matwork.store
www.matwork.store

WWW.METALTECH.CO

